

Total No. of Questions : 8]

SEAT No. :

PB2361

[Total No. of Pages : 4

[6263]-211

B.E. (Mechanical Engineering)

DYNAMICS OF MACHINERY

(2019 Pattern) (Semester - VII) (402042)

Time : 2½ Hours]

[Max. Marks : 70

Instructions to the candidates:

- 1) Answer Q1 or Q2, Q3 or Q4, Q5 or Q6, Q7 or Q8.
- 2) Neat diagrams must be drawn wherever necessary.
- 3) Use of logarithmic tables, slide rule, and electronic pocket calculator is allowed.
- 4) Figures to the right indicate full marks.
- 5) Assume suitable data, if necessary.

- Q1) a)** A combination of seven number of identical springs, each having a stiffness of 'K', supports a mass 'm' as shown in figure 1. Find the natural frequency of oscillations of mass 'm'. [8]



Figure 1.

- b) Explain with a neat diagram mathematical model of a Motor Bike. [5]
- c) Explain the following terms used in vibration [4]
 - i) Natural Frequency
 - ii) Amplitude
 - iii) Time period
 - iv) Resonance

OR

P.T.O.

Q2) a) A body of 5 kg is supported on a spring of stiffness 1960 N/m & has a dashpot connected to it, which produces a resistance of 1.96 N at a velocity of 1 m/sec. In what ratio will be amplitude of vibration reduced after 5 cycles? [8]

b) Derive the expression for Logarithmic decrement. [5]

c) Define the following terms used in vibration [4]

i) Critical Damping coefficient

ii) Coulomb damping

Q3) a) A vibrating system having a mass of 1 kg is suspended by a spring of stiffness 1000 N/m. It is put to harmonic excitation of 10 N. Assuming viscous damping, determine [10]

i) resonant frequency

ii) the phase angle at resonance

iii) amplitude of resonance

iv) frequency corresponding to peak amplitude

v) damped frequency. Take $C = 40 \text{ N-S/m}$.

b) Explain Transmissibility Vs. frequency ratio curve for different amounts of damping. [8]

OR

Q4) a) The springs of an automobile trailer are compressed 0.1m under its own weight. Find the critical speed when the trailer is passing over a road with a profile of sine-wave whose amplitude is 80 mm and the wavelength is 14 m. Find the amplitude of vibration at a speed of 60 km/hr. [10]

b) Derive an expression for deflection of vertical shaft carrying a single rotor without damping. [8]

- Q5) a) Find the natural frequency of the system shown in figure 2. [10]




Figure. 2

- b) Derive the equation for the length of Torsionally Equivalent Shaft. [8]

OR

- Q6) a) Using Matrix Method, determine only the natural frequencies of the system shown in figure. 3 [10]

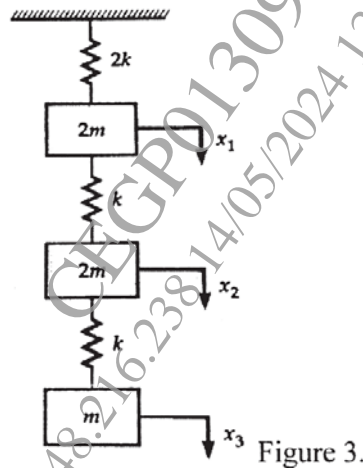


Figure 3.

- b) Explain free vibrations of a two rotor system using following parameters [8]
- neat diagram
 - frequency equations
 - Position of node
 - amplitude ratios of two rotors.

- Q7)** a) Differentiate Time domain and frequency domain Analysis. Explain how frequency spectrum can be used to detect vibration related faults in a system. [8]
- b) Write a short note on piezoelectric accelerometer. [5]
- c) Explain any one vibration isolator with a neat sketch. [4]

OR

- Q8)** a) Derive a relation between sound intensity level and sound pressure level. [8]
- b) Explain anechoic chamber and reverberant chamber. [5]
- c) Define the following terms [4]
- Sound absorption coefficient
 - Sound transmission coefficient.

x x x